

GENERAL SPECIFICATIONS

DESCRIPTION

The Chilli Pro dimmer provides exceptional control for DMX applications, but with the addition of our external control units, a host of new applications and system designs become available.

Using our custom-written ChilliNet protocol, the Chilli Pro accessories provide simple and rapid installation tools for system monitoring, environmental lighting control and simple preset building systems.

The ChilliNet system uses standard CAT 5 cabling to interconnect units in the system. Units are daisy chained together up to the maximum network limits.

The Chilli Pro Control Panel can be employed where simple scene setting is required. The two buttons of the controller provide direct access to the internal memories of dimmers on the network. Blackout and memory selection buttons provide straightforward control.

The panel has been designed to fit any standard UK single gang back box allowing simple installation and is available in brushed stainless steel or brass with illuminated buttons. Many Chilli Pro Control Panels can be used on a single network, providing multi-point control and modern good looks.

SPECIFICATIONS

- ▶ Number of control buttons : 2
- ▶ Number of memories available : 1
- ▶ Button Illumination : Red
- ▶ Maximum cable run from dimmer : 1000m
- ▶ Dimensions : 86mm (W) x 86mm (H) x 27mm (D)
- ▶ Maximum panels per dimmer : 4
- ▶ Maximum devices per network : 50
- ▶ Power Supply : Derived from dimmers

SUPPLIED ACCESSORIES

- ▶ Installation / Operating Instructions
- ▶ 2 fixing screws

ORDERING INFORMATION

- ▶ 2 Button Control Panel - Stainless : 01-205-00
- ▶ 2 Button Control Panel - Brass : 01-206-00



Zero 88 Lighting Ltd, Usk House, Lakeside Close, Llantarnam Park, Cwmbran, NP44 3HD, UK.

Tel : +44 (0) 1633 838088

Fax : +44 (0) 1633 867880

Email : enquiries@zero88.com

web : www.zero88.com

© Zero 88 Lighting Ltd. September 2002 (EU). Issue 1

E&OE. Zero 88 reserves the right to make changes to equipment and prices without prior notice.



ENGINEERING SPECIFICATIONS

ELECTRONICS

The control panel shall provide remote control of a dimmer unit. The panel shall provide recall of 1 static lighting state, held in the dimmer unit.

The unit shall feature two self-illuminating buttons which shall at all times show the status of the panel, and the currently selected lighting state. Button illumination shall be provided by a low voltage LED, and shall be red.

The control panel shall feature one buttons for direct access, along with an all off button which will stop any currently active sequence and clear all lighting states from the dimmer.

Power and control signal connections to the panel shall be made via a single, multi-pole connector, and shall be transported via Category 5 data cable. A daisy-chained connection system shall be employed for multi-unit installations.

The panel shall communicate using a digital data protocol, all panels connected in a system shall mimic the actions of the others providing visual feedback of the currently selected lighting state.

ELECTRICAL

The panel shall operate on a low voltage DC supply. This supply shall be derived from the connected dimmer unit. The maximum cable length from the supply source shall be 1000 metres.

MECHANICAL


The control panel shall be a 3 part construction comprising a front panel, a mounting frame and an electronics enclosure.

The front panel shall be constructed in either stainless steel or brass and shall be brush finished. The front panel legend shall be screen printed in black. The front panel shall hide the mounting screws for the unit, providing a clean finish.

The mounting frame and electronics shall be constructed in self-extinguishing plastic and shall clip together.

The front panel buttons shall be rear-lit, and shall have a textured surface to provide solid, even illumination across the face of the button, and a wide viewing angle.

Connections to the panel shall be located on the rear. The entire unit shall fit a UK single gang electrical back box.

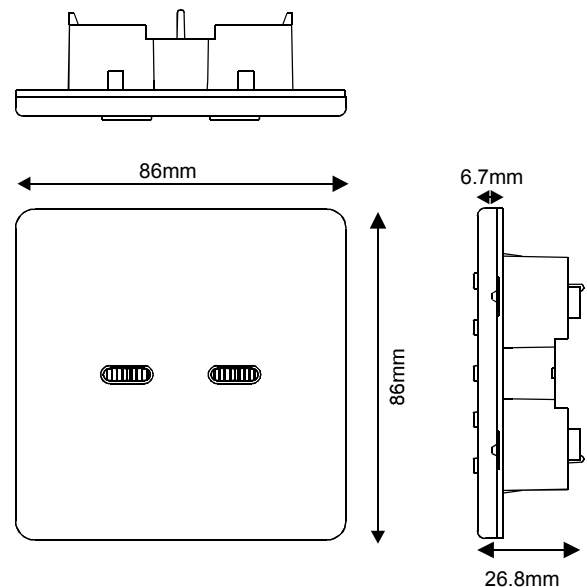

Zero 88 Lighting Ltd, Usk House, Lakeside Close, Llantarnam Park, Cwmbran, NP44 3HD, UK.

Tel : +44 (0) 1633 838088

Fax : +44 (0) 1633 867880

Email : enquiries@zero88.com

web : www.zero88.com

© Zero 88 Lighting Ltd. September 2002 (EU). Issue 1

E&OE. Zero 88 reserves the right to make changes to equipment and prices without prior notice.

